



 **FENHAR**

Fenhar New Material Co., LTD
凡華新材料有限公司

Contact
Add: FENGWANG INDUSTRY ZONE, LIUJI TOWN,
TONGSHAN DISTRICT, XUZHOU, CHINA 221116
Tel: +86 (516) 69927058
Website: www.fenharxz.com
Email: info@fenharxz.com

Free Samples

Fast Delivery

50 Tons Capacity Everyday

Over 20 Years in Composite Lamination

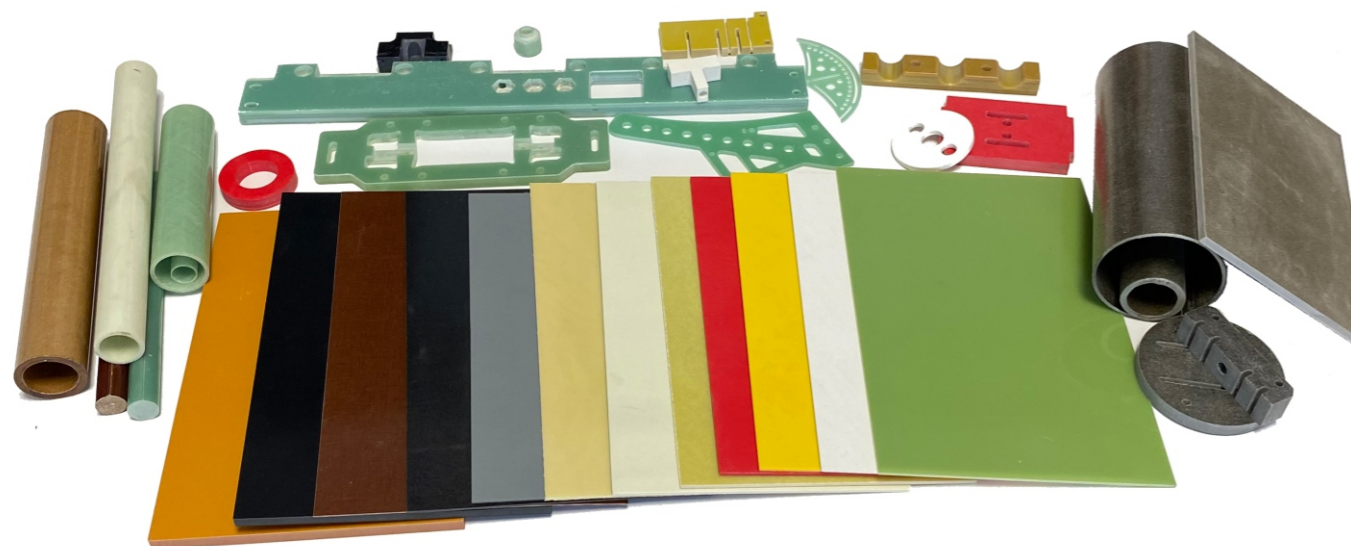
10 Years Experience in Exporting

Factory with Stable Quality

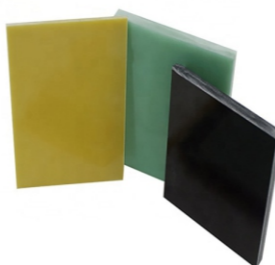
Factory with Competitive Price

Develop New Products As Your Demand

Full Series and sizes





G10/EPGC201/HGW2372
 Temperature Index: 130°C
 Application: Various plate reinforcement, motor, electrical equipment insulation structure parts
 Standard Sizes: 1020x2040mm, 1220x2440mm, 1020x1220mm
 Thickness: 0.1 to 200mm
 Colors: Green & Black & Yellow



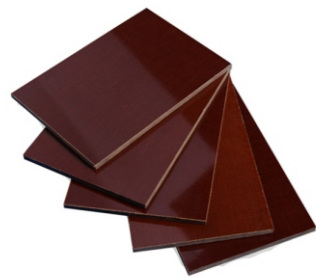
FR4/EPGC202/HGW2372.1
 Temperature Index: 130°C
 Application: Basic of PCB, marine, construction of relays, switches, standoffs, busbars, and so on
 Standard Sizes: 1020x2040mm, 1220x2440mm, 1020x1220mm
 Thickness: 0.1 to 200mm
 Colors: Green & Black & Yellow



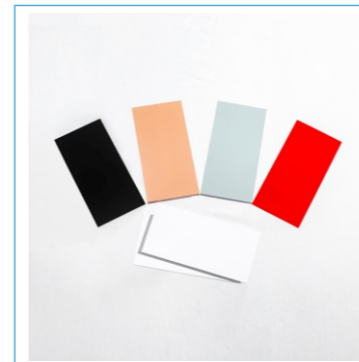
G11/EPGC203/HGW2372.4
 Temperature Index: 155°C
 Application: Terminal boards, high humidity conditions, test equipment, electric rotor insulation
 Standard Sizes: 1020x2040mm, 1220x2440mm, 1020x1220mm
 Thickness: 0.1 to 200mm
 Colors: Green & Light Yellow



G11/EPGC208/HGW2372.4
 Temperature Index: 180°C
 Application: Insulation structural parts in class H motor, transformer, brush holder, railway industry, etc.
 Standard Sizes: 1020x2040mm, 1220x2440mm, 1020x1220mm
 Thickness: 0.1 to 200mm
 Colors: Yellow Brown & Black


G3/PFGC201/HGW2072

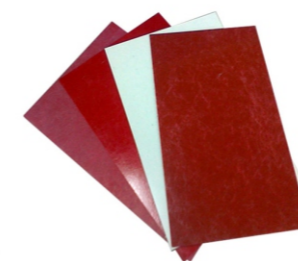
Temperature Index: 120°C
 Application: Seals, acid-resistant gaskets, oven internals, and various structural applications.
 Standard Sizes: 1020x2040mm, 1220x2440mm, 1020x1220mm
 Thickness: 0.2 to 100mm
 Colors: Brown & Black


UPGM203/GPO3/HM2471

Temperature Index: 155°C
 Application: Electrical insulation, mechanical applications, structural parts
 Standard Sizes: 1000x2000mm, 1250x2500mm, 1250x2000mm
 Thickness: 0.8 to 40mm
 Colors: Red & Grey & White & Brown & Beige


G7/SIGC202/HGW2572

Temperature Index: 180°C
 Application: Class H, arc resistant applications
 Standard Sizes: 1020x2040mm, 1220x2440mm, 1020x1220mm
 Thickness: 0.1 to 100mm
 Colors: White


UPGM201/GPO3/HM2471

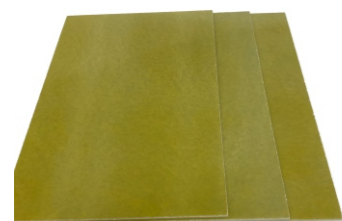
Temperature Index: 155°C
 Application: Electrical insulation, mechanical applications, structural parts
 Standard Sizes: 1000x2000mm, 1250x2500mm, 1250x2000mm
 Thickness: 2 to 40mm
 Colors: Red & Grey & White & Brown & Beige


PIGC301/Polyimide Fiberglass Sheet

Temperature Index: 180°C
 Application: Class H, arc resistant applications
 Standard Sizes: 1020x2040mm, 1220x2440mm, 1020x1220mm
 Thickness: 0.4 to 60mm
 Colors: Red Brown


PFCC201/HGW2082/Textolite

Temperature Index: 120°C
 Application: Mechanical applications such as gears, friction rollers, vacuum pump vanes, friction surface.
 Standard Sizes: 1020x2040mm, 1220x2440mm, 1020x1220mm
 Thickness: 0.4 to 200mm
 Colors: Brown & Black


EPGM203/Epoxy Glass Mat Sheet

Temperature Index: 180°C
 Application: Insulation structural parts in class H motor, transformer, brush holder, railway industry, etc.
 Standard Sizes: 1020x2040mm, 1020x1220mm
 Thickness: 0.5 to 100mm
 Colors: Light Yellow


PFPC201/XPC/HGW2062

Temperature Index: 120°C
 Application: Electrical & mechanical parts, such as switchboards, panel boards, insulating washers, etc
 Standard Sizes: 1020x2040mm, 1220x2440mm, 1020x1220mm
 Thickness: 0.5 to 50mm
 Colors: Brown & Black & Orange



PFCC21/PFCC21/EPGC21/SIMP21
 Application: Insulation component for brush holders, switching equipment, transformers, coil couplings, ducts, coil reels, insulation sheaths, etc
 Min ID: 6mm
 Max OD: 1000mm
 Length: 1000mm



EPGC41/PFCC41
 Application: Insulating structural components, screw processing parts in electrical equipments and can be used in humid condition and transformer oil.
 Min Diameter: 6mm
 Max Diameter: 200mm
 Length: 1000mm



Mica Sheet
 Temperature Index: 600 to 800°C
 Application: Heating resistance supports and insulation in household and industrial application
 Standard Sizes: 1200x2000mm, 1200x2400mm, 1200x3200mm
 Thickness: 0.2 to 200mm
 Colors: Golden & Dark Golden



Machined Parts
 Temperature Index: 180°C
 Application: Insulation structural parts in class H motor, transformer, brush holder, railway industry, etc.
 Standard Sizes: 1020x2040mm, 1020x1220mm
 Thickness: 0.5 to 100mm
 Colors: Light Yellow



ISO9001



Epoxy Sheet SGS



ISO14001



Phenolic Sheet SGS